

A modern bathroom interior featuring a walk-in shower with a curved showerhead, a white toilet, and a white bathtub. The walls are covered in large, dark grey tiles, and the floor is made of light-colored wood. A wooden shelf holds various bathroom items. The text "Aqua Ambient" is overlaid on the right side of the image.

**Aqua**  
*Ambient*

**LINEAR, POINT  
AND WALL BATHROOM  
INLETS**



# THE FUNCTIONALITY AND ELEGANCE OF AQUA AMBIENT BATHROOM INLETS WILL CHANGE THE LOOK OF YOUR BATHROOM

AQUA AMBIENT LINEAR, WALL AND POINT BATHROOM INLETS ARE ADVANCED DRAINAGE DEVICES. IDEAL FOR REPLACING CONVENTIONAL SOLUTIONS SUCH AS SHOWER BASES AND CLOSED SHOWER CABINS.

THEY ARE MANUFACTURED ACCORDING TO THE HIGHEST STANDARDS, FINISHED WITH AN ELEGANT STAINLESS STEEL GRATE, AND ARE A FUNCTIONAL AND CONVENIENT SOLUTION FOR ANY INTERIOR.

MODERN DESIGN IS OUR PASSION. THANKS TO WHICH ONE-OF-A-KIND, UNIQUE DESIGNS ARE CREATED WHICH MAKE YOUR BATHROOM DIFFERENT FROM ALL OTHERS.



**Aqua** *Ambient*

\* LINEAR BATHROOM  
INLET WITH THE SPOT  
GRATE



# LINEAR BATHROOM INLETS



## IN A WATERPROOFING FLANGE VERSION

\* ALSO AVAILABLE IN A VERSION WITH AN ADDITIONAL WATERPROOFING FLANGE



THE PERFECTLY-SMOOTH SURFACE OF THE GRATE PROVIDES HIGH COMFORT OF USE

THE APPLICATION OF THE FLANGE ENSURES IMPERVIOUSNESS DUE TO EASY INSTALLATION, AND THE PROLONGED DURABILITY OF THE WATERPROOFING LAYER IN THE FLOOR

Made of stainless steel.

The functional, easily pulled-out syphon ensures easy cleaning and maintenance.

Standard lengths available:  
600, 700, 800, 900 and 1000 mm.

Minimum installation height 81 mm.

Flow: 0.8 litres/s.



Capricorn Quality

**STATE-OF-THE-ART,  
ELEGANT DESIGN MARKED WITH  
THE CAPRICORN QUALITY MARK**



# CHOOSE ONE OF THE ORIGINAL DESIGNS OF GRATES AND GRILLS

## TYPES OF FINISH



ARCO



SPOT



ORIENT



CUBE



PLAIN



STONE


LENGTH [MM]	ARCO	SPOT	ORIENT	CUBE	PLAIN	STONE
600	9-2993-600-00-24-12	9-2992-600-00-24-12	9-2991-600-00-24-12	9-2994-600-00-24-12	9-2995-600-00-24-12	9-2965-600-00-24-12
700	9-2993-700-00-24-12	9-2992-700-00-24-12	9-2991-700-00-24-12	9-2994-700-00-24-12	9-2995-700-00-24-12	9-2965-700-00-24-12
800	9-2993-800-00-24-12	9-2992-800-00-24-12	9-2991-800-00-24-12	9-2994-800-00-24-12	9-2995-800-00-24-12	9-2965-800-00-24-12
900	9-2993-900-00-24-12	9-2992-900-00-24-12	9-2991-900-00-24-12	9-2994-900-00-24-12	9-2995-900-00-24-12	9-2965-900-00-24-12
1000	9-2993-000-00-24-12	9-2992-000-00-24-12	9-2991-000-00-24-12	9-2994-000-00-24-12	9-2995-000-00-24-12	9-2965-000-00-24-12



# WALL BATHROOM INLETS

THE WALL BATHROOM INLETS LINE IS  
MADE TO THE HIGHEST STANDARDS,  
AND IS A MODERN AND FUNCTIONAL  
SOLUTION FOR EVERY BATHROOM.



IT IS PERFECT FOR MINIMALISTIC INTERIORS.  
IT IS DESIGNED FOR ROOMS OF AN INCREASED  
STANDARD.

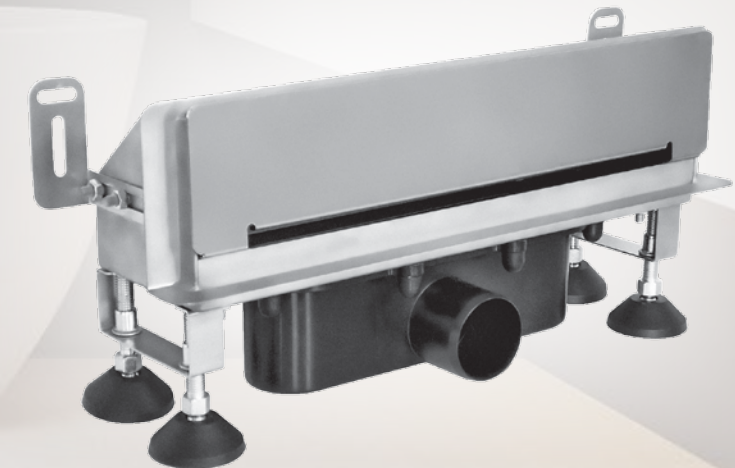


\* WALL BATHROOM INLET  
WITH A POLISHED COVER

# WALL BATHROOM INLETS

## IN A POLISHED-COVER VERSION

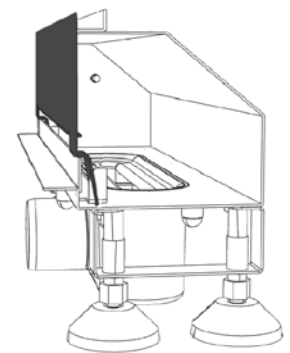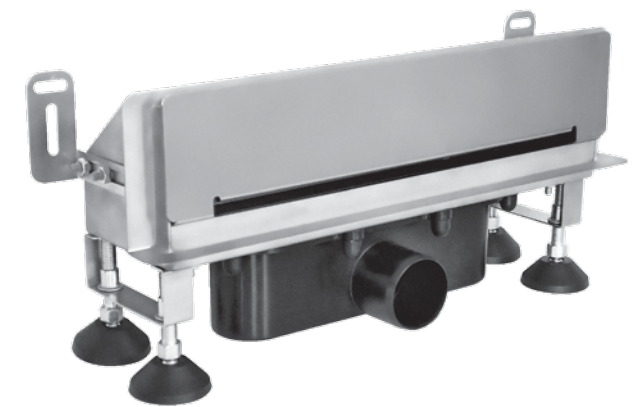

## IN AN UNDER-TILE COVER

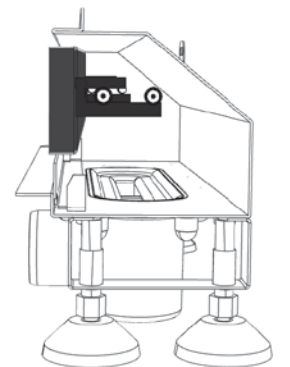

Aqua wall bathroom inlets are made of stainless steel. Full access to the syphon ensures easy cleaning and maintenance. Each solution provides an amazing aesthetic experience of a finished bathroom. Drain-flow capacity: 0.8 litres/s.

## THE AQUA AMBIENT WALL BATHROOM INLET IS A NEW TREND OF WATER DRAINAGE

SPECIALLY DESIGNED FOR FILLING WITH TILES OR NATURAL STONES AND A POLISHED COVER VERSION GRATE ARE A FUNCTIONAL AND, AT THE SAME TIME, SUBTLE ELEMENT OF INTERIOR DESIGN.



\* WALL BATHROOM INLET WITH AN UNDER TILE COVER





# SUPER AND CLASSIC POINT BATHROOM INLETS

THANKS TO THEIR ADVANCED CONSTRUCTION  
AND STYLISH DESIGN, THEY ARE IDEAL FOR  
BATHROOMS, SWIMMING POOLS AND SPA  
FACILITIES.



\* POINT BATHROOM INLETS  
WITH THE ORIENT GRATE

CLASSIC  
POINT INLETS



Connection type:  
side



Connection type:  
side with a flange



Connection type:  
straight



Connection type:  
straight with a flange

THE AQUA AMBIENT POINT  
BATHROOM INLET LINE  
IS CHARACTERISED BY MODERN  
DESIGN AND AT THE SAME  
TIME PROVIDES AN ELEGANT  
ALTERNATIVE TO CONVENTIONAL  
SHOWER CABINS.

Made of stainless steel - makes cleaning easier.  
Universal - fit every interior type.  
Designed for Ø 50-diameter pipes.  
Minimum installation height: 116 mm.  
Flow: 0.8 litres/s.

SUPER  
POINT INLETS



Connection type:  
flow



Connection type:  
side

DESIGNED SPECIALLY  
FOR ROOMS WITH LIMITED FLOOR  
HEIGHT (WOODEN CEILINGS,  
ATTICS, ETC.)

The low body (60 mm) facilitates installation  
in low-floor rooms.  
Designed for Ø 40 or Ø 50 diameter pipes.  
Minimum installation height: 63 mm.


Flow:  
Ø 40 – 0.2 litres/s  
Ø 50 – 0.4 litres/s



\* POINT BATHROOM INLETS  
WITH THE CUBE GRATE



CLASSIC  
POINT INLETS

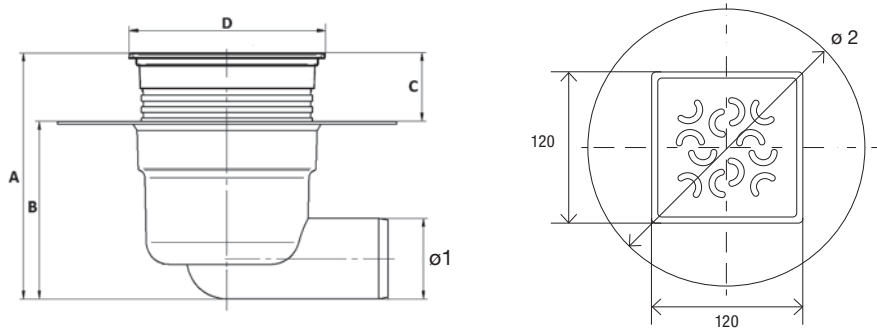


CONNECTION TYPE	DIMENSIONS [MM]					
	A	B	C	D	Ø1	Ø2
SIDE Ø50	120÷150	110	10÷30	120	50	-
SIDE WITH A FLANGE Ø50	120÷150	110	10÷30	120	50	210
STRAIGHT Ø50	146÷177	138	8÷31	120	50	-
STRAIGHT WITH A FLANGE Ø50	146÷177	140	6÷31	120	50	210

**Material**  
body: plastic  
grate: stainless steel

Designed for Ø 50 diameter


TYPES OF FINISH

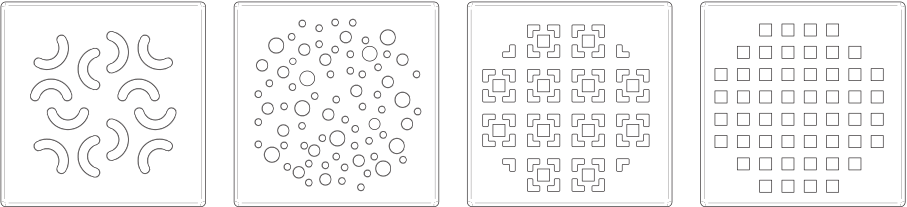

ARCO                      SPOT                      ORIENT                      CUBE

	SIDE	SIDE WITH A FLANGE	STRAIGHT	STRAIGHT WITH A FLANGE
ARCO	9-2605-050-47-01-10	9-2625-050-47-01-10	9-2605-050-46-01-10	9-2625-050-46-01-10
SPOT	9-2604-050-47-01-10	9-2624-050-47-01-10	9-2604-050-46-01-10	9-2624-050-46-01-10
CUBE	9-2608-050-47-01-10	9-2628-050-47-01-10	9-2608-050-46-01-10	9-2628-050-46-01-10
ORIENT	9-2609-050-47-01-10	9-2629-050-47-01-10	9-2609-050-46-01-10	9-2629-050-46-01-10

SUPER  
POINT INLETS

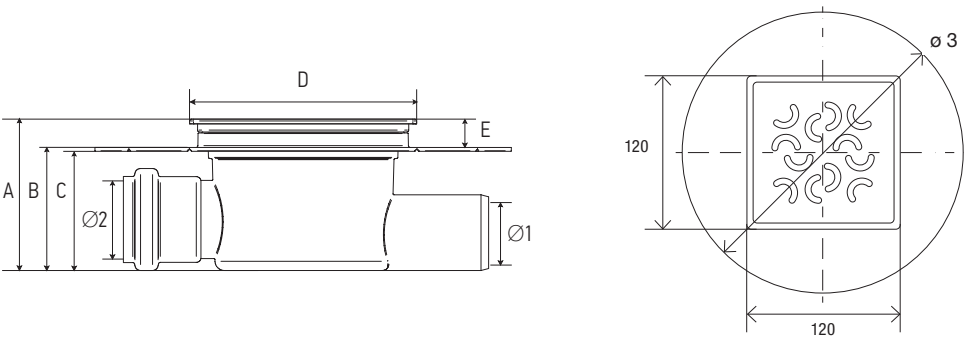


CONNECTION TYPE	DIMENSIONS [MM]							
	A	B	C	D	E	Ø1	Ø2	Ø3
SIDE Ø40	80÷105	65	63	120	15	40	-	220
SIDE Ø50	80÷105	65	63	120	15	50	-	220
FLOW Ø40	80÷105	65	63	120	15	40	40	220
FLOW Ø50	80÷105	65	63	120	15	50	50	220

**Material**  
body: plastic  
grate: stainless steel

Designed for Ø 50 or Ø 40 diameter


TYPES OF FINISH

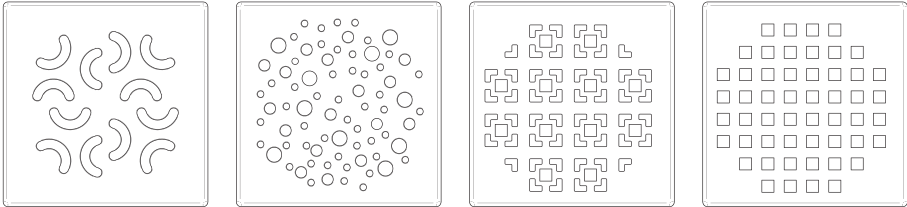

ARCO                      SPOT                      ORIENT                      CUBE

	SIDE Ø40	SIDE Ø50	FLOW Ø40	FLOW Ø50
ARCO	9-2631-040-47-01-10	9-2631-050-47-01-10	9-2631-040-48-01-10	9-2631-050-48-01-10
SPOT	9-2632-040-47-01-10	9-2632-050-47-01-10	9-2632-040-48-01-10	9-2632-050-48-01-10
CUBE	9-2633-040-47-01-10	9-2633-050-47-01-10	9-2633-040-48-01-10	9-2633-050-48-01-10
ORIENT	9-2634-040-47-01-10	9-2634-050-47-01-10	9-2634-040-48-01-10	9-2634-050-48-01-10

LINE  
INLETS

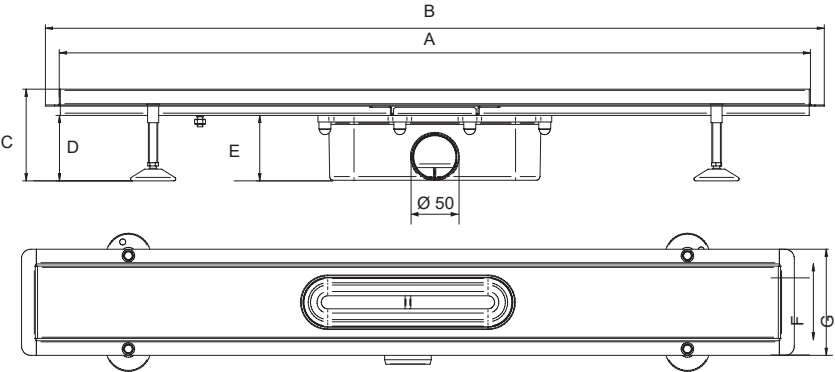

LENGTH [MM]	DIMENSIONS [MM]							
	Ø	A	B	C	D	E	F	G
600	50	600	630	98÷127	70÷99	69	83	114
700	50	700	730	98÷127	70÷99	69	83	114
800	50	800	830	98÷127	70÷99	69	83	114
900	50	900	930	98÷127	70÷99	69	83	114
1000	50	1000	1030	98÷127	70÷99	69	83	114

GRATE CODES



LENGTH [MM]	ARCO	SPOT	ORIENT	CUBE	PLAIN	STONE
600	9-2993-600-00-24-12	9-2992-600-00-24-12	9-2991-600-00-24-12	9-2994-600-00-24-12	9-2995-600-00-24-12	9-2965-600-00-24-12
700	9-2993-700-00-24-12	9-2992-700-00-24-12	9-2991-700-00-24-12	9-2994-700-00-24-12	9-2995-700-00-24-12	9-2965-700-00-24-12
800	9-2993-800-00-24-12	9-2992-800-00-24-12	9-2991-800-00-24-12	9-2994-800-00-24-12	9-2995-800-00-24-12	9-2965-800-00-24-12
900	9-2993-900-00-24-12	9-2992-900-00-24-12	9-2991-900-00-24-12	9-2994-900-00-24-12	9-2995-900-00-24-12	9-2965-900-00-24-12
1000	9-2993-000-00-24-12	9-2992-000-00-24-12	9-2991-000-00-24-12	9-2994-000-00-24-12	9-2995-000-00-24-12	9-2965-000-00-24-12

PRODUCT CODE

LENGTH [MM]	STANDARD VERSION	LENGTH [MM]	WATERPROOFING FLANGE VERSION
600	9-2970-600-50-24-12	600	9-2971-600-50-24-12
700	9-2970-700-50-24-12	700	9-2971-700-50-24-12
800	9-2970-800-50-24-12	800	9-2971-800-50-24-12
900	9-2970-900-50-24-12	900	9-2971-900-50-24-12
1000	9-2970-000-50-24-12	1000	9-2971-000-50-24-12

WALL  
INLETS

WITH A POLISHED COVER

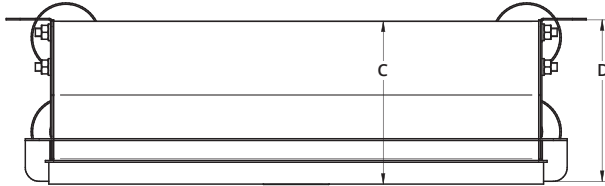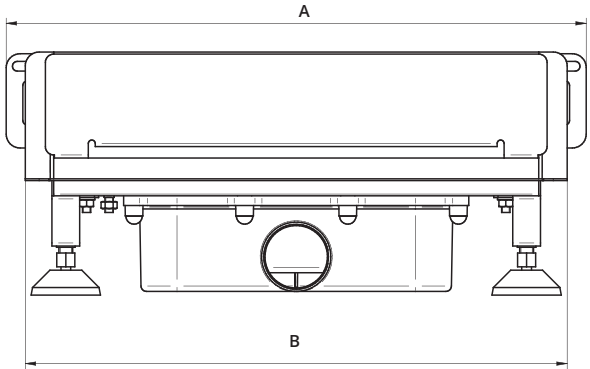



**Material**  
body: stainless steel  
siphon: ABS/PP

**Flow**  
0.8 litres/s

PRODUCT CODE

PRODUCT CODE	MODEL
9-2922-050-00-24-12	AQUA AMBIENT WALL BATHROOM INLET WITH A POLISHED COVER
9-2925-050-00-24-12	AQUA AMBIENT WALL BATHROOM INLET WITH AN UNDERTILE COVER

WITH AN UNDER TILE COVER

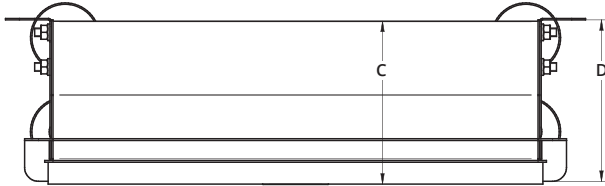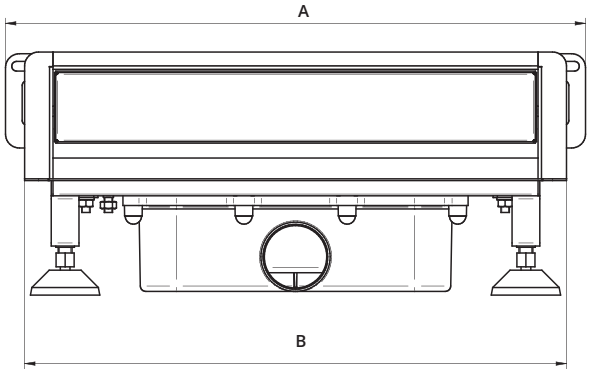

WALL INLET	DIMENSIONS (MM)			
	A	B	C	D
WITH A POLISHED COVER	418,5	391	118	116,5
WITH AN UNDER TILE COVER	418,5	391	118	116,5



Visit our website:



CAPRICORN S.A.  
CIERNIE 11, 58-160 ŚWIEBODZICE

TEL.: +48 74 854 05 16  
FAX: +48 71 722 28 18

zamowienia@capricorn.pl  
www.capricorn.pl